

Portable

NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking

- Band pass powered subwoofer for portable PA and installation applications
- 3,000 Watt power featuring KLARK TEKNIK Class-D technology
- KLARK TEKNIK Digital Signal Processing for total system control
- ULTRANET digital audio networking connects to mixers and other sources
- Double suspension 18" low frequency driver with inside/outside wound coil
- Fully featured user interface with LCD display for ease of navigation
- PC remote control software downloadable at turbosound.com
- Low distortion dual port design for maximum sound pressure level
- 18 mm (¾") birch plywood enclosure with hard wearing semi matt black paint finish
- Integral M10 rigging points for ease of installation
- 35 mm pole mount to support satellite speaker
- Mains input on Neutrik powerCON* connector
- 10-Year Warranty Program*
- Designed and engineered in the U.K.



The 3,000 Watt NuQ118B-AN is a powered 18" dual ported bandpass enclosure that is optimally tuned for extended low frequency response. Designed to work individually without a controller, the NuQ118B-AN provides very high output FOH performance and is ideally suited for a wide range of music and live sound reinforcement applications.



The NuQ118B-AN features a powerful, double suspension 18" low frequency driver that utilizes a specialised inside/outside wound voice coil for higher magnetic density, better heat dissipation, high power handling capacity, and improved efficiency. For its size and operating bandwidth, the NuQ118B-AN delivers extremely high output that is virtually distortion-free – even in the most demanding applications.

Output power for the NuQ118B-AN is provided by means of an efficient and lightweight **KLARK TEKNIK** 3,000-Watt Class-D power amplifier. A sophisticated, but easy to use **KLARK TEKNIK** Digital Signal Processor (DSP) provides dynamic EQ for impressive low frequency response at low volume levels and transparent limiting for clarity at high output levels – and for long-term reliability.

*All third-party trademarks are the property of their respective owners. Their use neither constitutes a claim of the trademark nor affiliation of the trademark owners with MUSIC Group. Product names are mentioned solely as a reference for compatibility, effects and/or components. Warranty details can be found at music-group.com.

NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking

On the rear panel of the amplifier module, the user interface's LCD display and single rotary encoder provide intuitive access to: position compensation, user EQ control, crossover alignment and signal routing features. In addition to the balanced XLR input, an XLR output is provided for daisy-chaining more active subwoofers, or for use with active full range satellite speakers. An onboard USB port provides access for remote control of the NuQ118B-AN via PC computer, as well as DSP firmware updates.

ULTRANET connectivity is provided by two locking etherCON* connectors. Up to 16 independent channels of 24-bit digital audio and control data are transmitted via a single CAT5 cable between compatible digital devices – including mixers, I/O stage boxes, powered loudspeakers and personal monitoring systems. Simplified cable routing and ease of setup translate directly into significant time saved during installation.

Finished in a highly durable semi matt black paint, the cabinet is constructed from 18 mm (¾") birch plywood and includes: multiple M10 threaded rigging points; a 35 mm pole socket for satellite speaker mounting; integrated carry handles for convenient transport – and high impact interlocking corners for ground stacking stability. Mains power input is provided via a Neutrik powerCON* connector.



You Are Covered


We always strive to provide the best possible Customer Experience. Our products are made in our own [MUSIC Tribe](#) factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous [Warranty program](#).

Portable

NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking


Frequency Response Sensitivity 1 W / 1 m

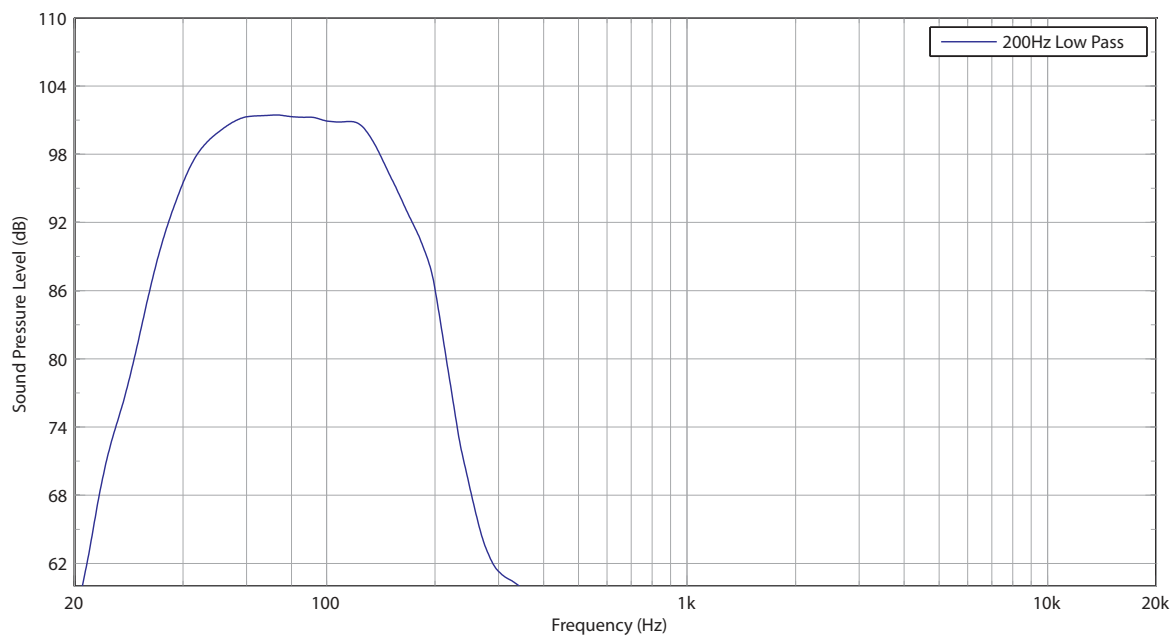

NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking

Dimensions

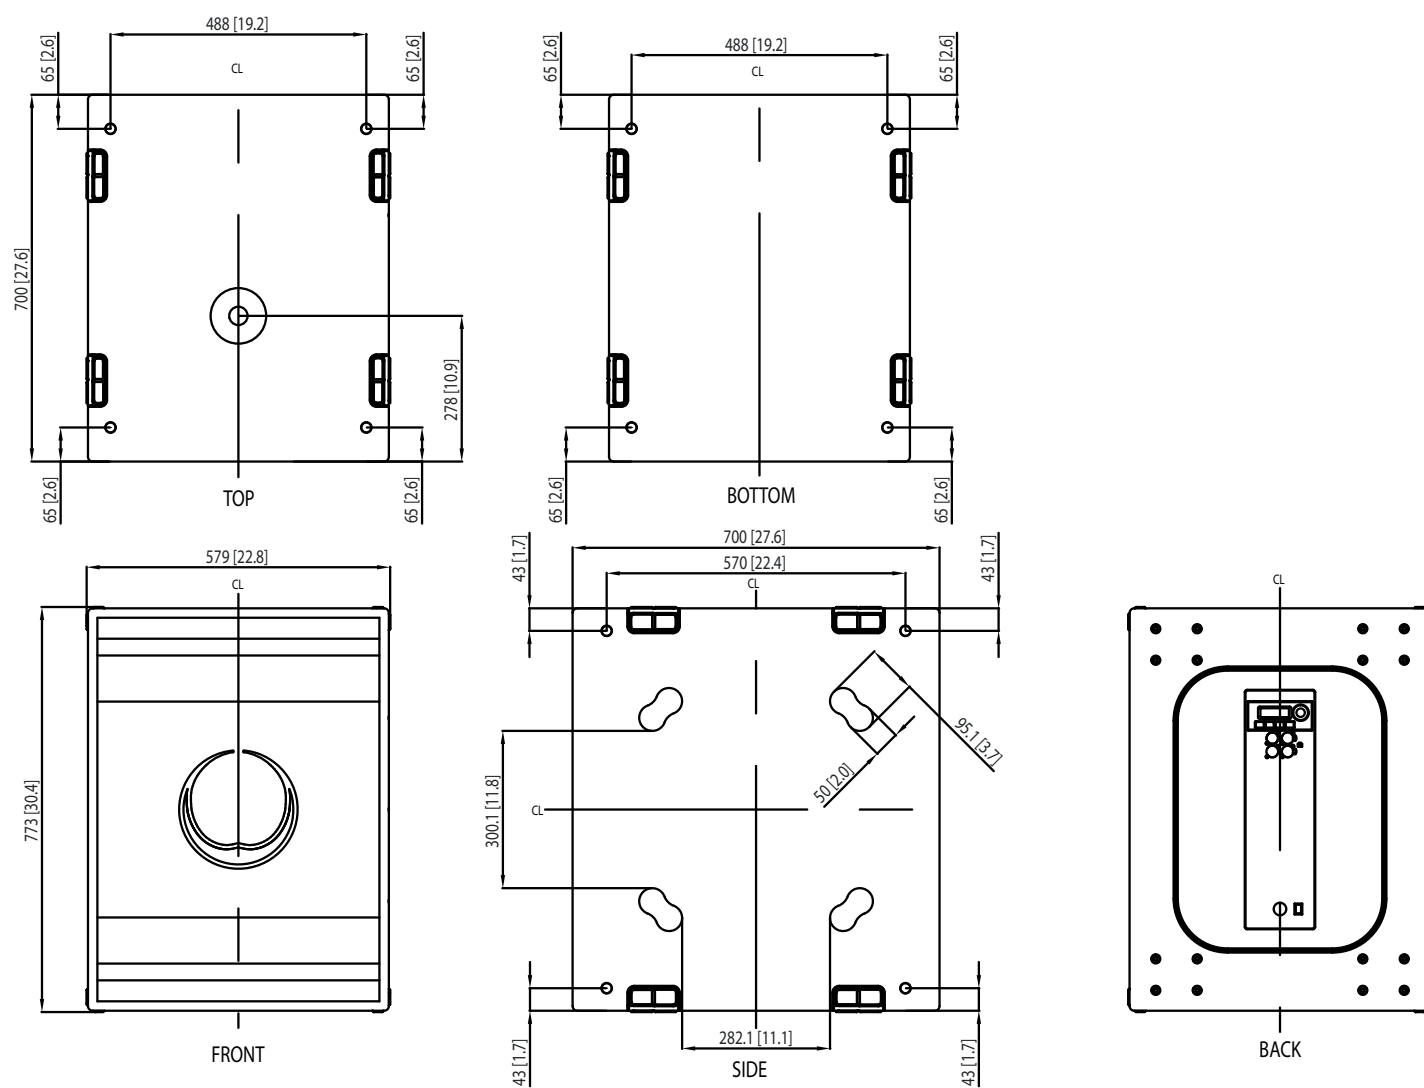

Portable

NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking

Technical Specifications

System

| | |
|--------------------|--|
| Frequency Response | 40 Hz – 150 Hz ± 3 dB 33 Hz – 150 Hz -10 dB |
| Nominal Dispersion | Half Space |
| Maximum SPL | 136 dB peak |
| Crossover type | Active |
| Transducers | 1 x 18" (460 mm) LF driver |
| Limiter | Peak and rms |

Amplifier

| | |
|-----------------------|------------------------|
| Maximum Output Power* | 3000W |
| Type | Class-D |
| Protection | Short circuit, thermal |

Connectors

| | |
|---------------------|--------------------------------------|
| Input/link | 1 x Combo Jack/XLR 1 x XLR |
| Sensitivity | +4dBu or +14 dBu software switchable |
| Input impedance | 40 k Ω balanced |
| Maximum input level | +22 dBu |
| Ultraset input/link | 2 x RJ45 |
| Mains Supply | Neutrik powerCON 20A+ |

Controls

| | |
|-----|--|
| DSP | Rotary push-encoder and level control Buttons for Process, Setup, Exit, Enter |
|-----|--|

User DSP Functions

| | |
|--------------------|---|
| Factory EQ Presets | Positioning, Sound mode |
| Display | LCD 128 x 32, blue, backlit |
| Delay | 0 - 300 ms |
| Equalisation | High and low shelving EQ 2 x parametric EQ |
| Limiter | Zero attack input limiter |
| Presets | 20 total presets, 19 user-definable |
| Crossover | Low Pass L-R 24 dB/oct |
| Protection | Lock-out function for all settings |

Ultraset Digital Network

| | |
|--------------------|--------------------------------|
| Digital processing | |
| A/D conversion | 24-bit, 44.1/48kHz sample rate |
| Converter type | 24-bit, delta-sigma |
| System | |
| Signal | 16 channels |
| Latency | < 0.9 ms |
| Frequency response | 20 Hz to 20 kHz (+0 / -3 dB) |
| Dynamic range | typical 92 dB |
| Cabling | |
| Cables | Shielded CAT5 |
| Cable length | max. 246 ft / 75 m recommended |

Portable

NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking

Power Supply

| | |
|--------------------------|---------------------------------------|
| Power consumption | 180W @ 1/8 max power |
| Voltage (fuses) | |
| USA / Canada | 120 V~, 60 Hz (T 15 A H 250 V) |
| UK / Australia / Europe | 220-240 V~, 50/60 Hz (T 10 A H 250 V) |
| Korea / China | 220-240 V~, 50/60 Hz (T 10 A H 250 V) |
| Japan | 100 V~, 50/60 Hz (T 15 A H 250 V) |

Enclosure

| | |
|-------------------------------|--|
| Dimensions (H x W x D) | 773 x 579 x 700 mm (30.4 x 22.8 x 27.6") |
| Net weight | 57.9 kg (127.5 lbs) |
| Construction | 18 mm (¾") birch plywood |
| Finish | Semi matt black paint |
| Grille | Powder coated perforated steel |
| Flying hardware | M10 x 16 points |

*independent of limiters and driver protection circuits

†Neutrik and powerCON speakON are registered trademarks of Neutrik AG.

‡Only qualified personnel are allowed to modify the AC-Main cord and to adhere to all applicable national standards.

Portable

NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking

Architecture & Engineering Specifications

The loudspeaker shall be of the powered subwoofer type, consisting of one 18" (460 mm) LF driver. Performance specifications of a typical production unit shall meet or exceed the following: frequency response, measured with swept sine wave input, shall be flat within ± 3 dB from 40 Hz to 150 Hz and within -10 dB from 33 Hz to 150 Hz. Nominal dispersion shall be "half space." Maximum amplifier output power shall be 3,000 Watts peak, independent of limiters and driver protection circuits. Maximum SPL (peak), measured at 1 metre with music program, shall be 136 dB. Dimensions: 773 mm high x 579 mm wide x 700 mm deep (30.4" x 22.8" x 27.6"). Net weight: 57.9 kg (127.5 lbs). The loudspeaker system shall be the **TURBOSOUND** NuQ118B-AN. No other loudspeaker shall be acceptable unless submitted data from an independent test laboratory verifies that the above combined performance / size specifications are equaled or exceeded.

Portable

NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking



Portable

NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking



NuQ118B-AN

3000 Watt 18" Band Pass Subwoofer
with KLARK TEKNIK DSP Technology and
ULTRANET Networking



For service, support or more information contact the TURBOSOUND location nearest you:

Europe
MUSIC Tribe Brands UK Ltd.
Tel: +44156 273 2290
Email: CARECrea@music-group.com
CAREEnte@music-group.com
CARELife@music-group.com

USA/Canada
MUSIC Tribe Commercial NV Inc.
Tel: +1 702 800 8290
Email: CARECrea@music-group.com
CAREEnte@music-group.com
CARELife@music-group.com

Japan
MUSIC Tribe Services JP K.K.
Tel: +81 3 6231 0453
Email: CARECrea@music-group.com
CAREEnte@music-group.com
CARELife@music-group.com

MUSIC Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and COOLAUDIO are trademarks or registered trademarks of MUSIC Group IP Ltd.
© MUSIC Group IP Ltd. 2018 All rights reserved.